
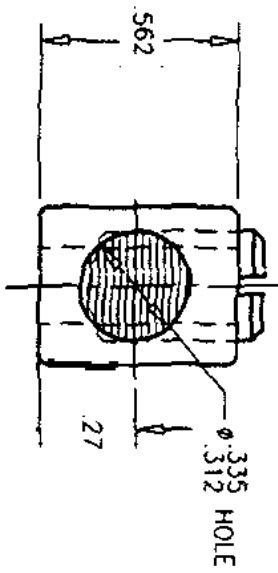


5-24 UNF - 2B Thrds (2)

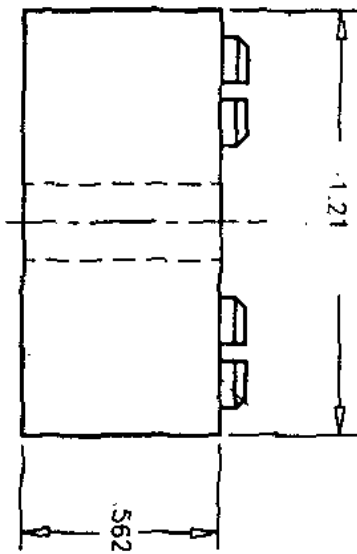

**SPECIFICATIONS:**

- WIRE RANGE: 2-8 AWG. AL, 2-14 AWG. CU
- CONNECTOR TO BE UL LISTED OR RECOGNIZED COPPER AND ALUMINUM CONDUCTORS.
- WIRE CLAMPING SCREW: ALUMINUM ALLOY, 5/16-24 X 1/2 LG. SLOTTED HEADLESS SET SCREW WITH DOME SHAPED BOTTOM. ( SUPPLY 2 PER CONNECTOR)
- MARKING SHALL INCLUDE: 6.1 MANUFACTURER'S NAME OR SYMBOL.
- 6.2 MANUFACTURER'S PART NO.
- 6.3 WIRE RANGE.
- 6.4 AL9CU
- 6.5 UL LISTING OR RECOGNITION MARK.

**CONNECTOR  
(2-8 AL, 2-14 CU)**

tinplate