


File E129884

UL LISTED

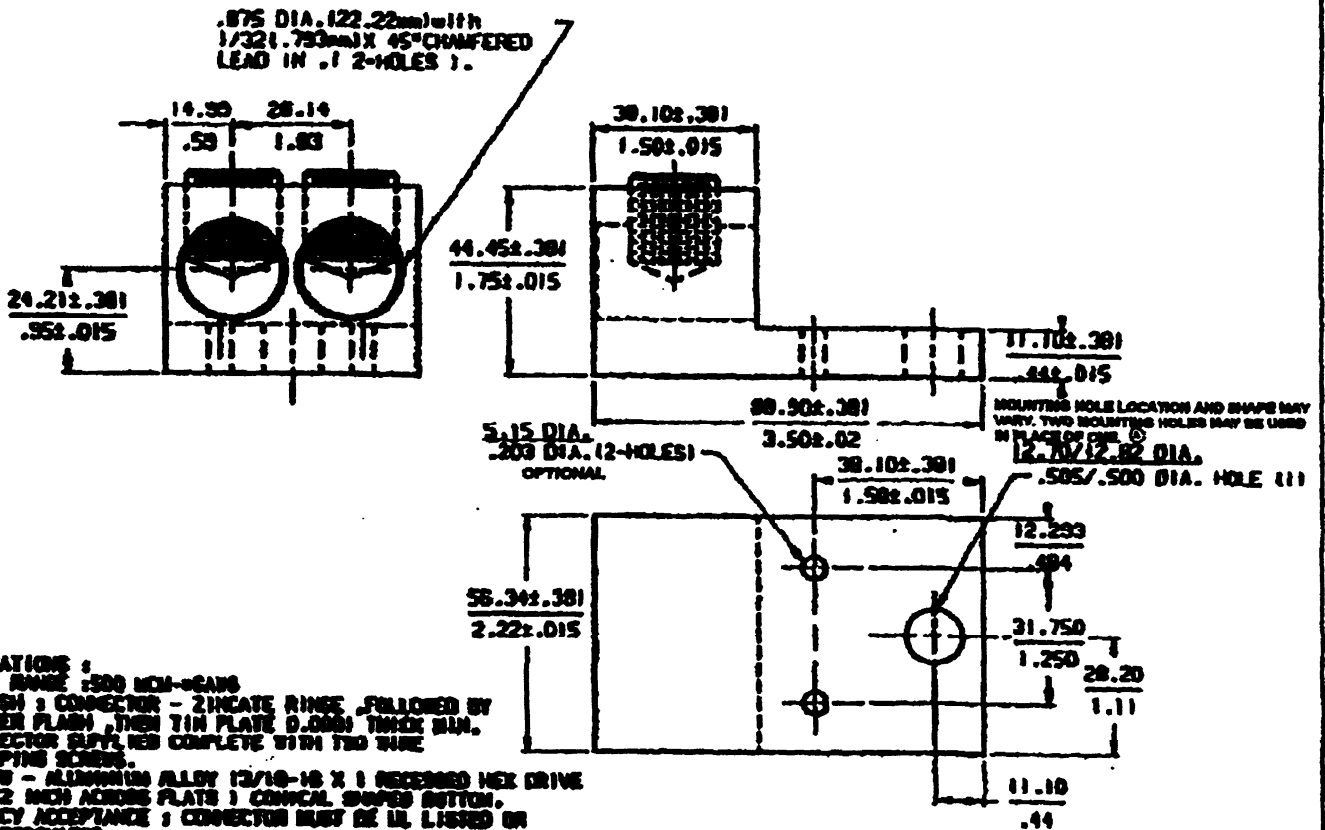

- SPECIFICATIONS :**
1. WIRE RANGE : 500 MCM - 6GAWG
 2. FINISH : CONNECTOR - ZINCATE RING, FOLLOWED BY COPPER FLASH, THEN TIN PLATE 0.0001 THICK MIN.
 3. CONNECTOR SUPPLIED COMPLETE WITH TWO SIZE CLAMPING SCREWS.
SCREWS - ALUMINUM ALLOY (3/16-16 X 1 RECESSED HEX DRIVE 1 1/2 INCH ACROSS FLATS) CONICAL SHAPED BOTTOM.
 4. AGENCY ACCEPTANCE : CONNECTOR MUST BE UL LISTED OR UL RECOGNIZED.
 5. MARKING SHALL BE LEGIBLE AND SHALL INCLUDE :
MANUFACTURER'S TRADEMARK OR IDENTIFICATION,
CATALOG NUMBER,
WIRE RANGE,
MTCJ.
 6. AUTHORIZED SOURCE : INT'L HYDRAULICS.

INTERNATIONAL HYDRAULICS
INCORPORATED

WFM

2S500

DRW. BY CDMR	DATE 11/18/88	DRAWING NO. 14221	REV. A
CHK. BY N-18	SCALE		