


File E129884

UL LISTED

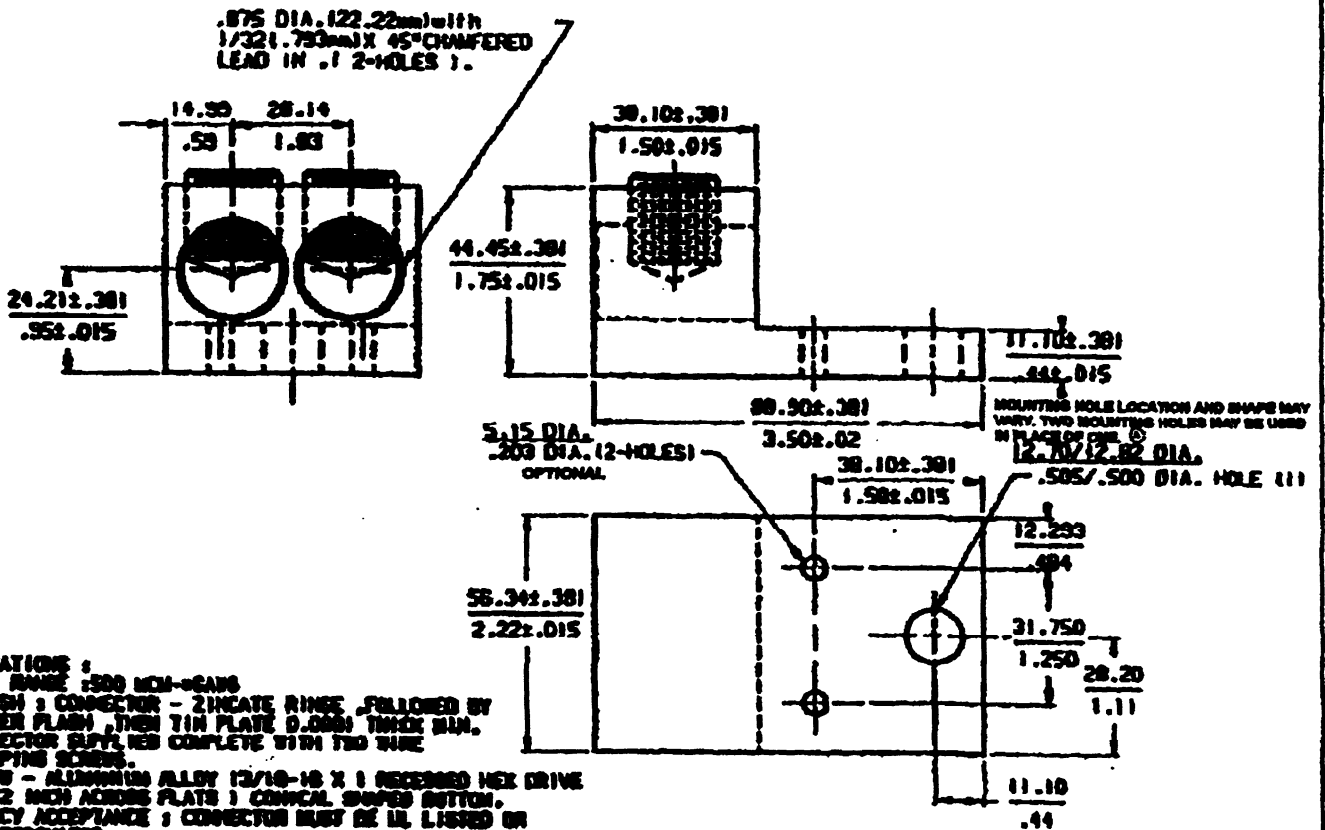

- SPECIFICATIONS :**
1. WIRE RANGE : 500 MCM - 600 MCM
  2. FINISH : CONNECTOR - ZINCATE RING, FOLLOWED BY COPPER FLASH, THEN TIN PLATE 0.0001 THICK MIN.
  3. CONNECTOR SUPPLIED COMPLETE WITH TWO SIZE CLAMPING SCREWS.  
SCREWS - ALUMINUM ALLOY (3/16-16 X 1) RECESSED HEX DRIVE (1/2 INCH ACROSS FLATS) CONICAL SHAPED BOTTOM.
  4. AGENCY ACCEPTANCE : CONNECTOR MUST BE UL LISTED OR UL RECOGNIZED.
  5. MARKING SHALL BE LEGIBLE AND SHALL INCLUDE :  
MANUFACTURER'S TRADEMARK OR IDENTIFICATION,  
CATALOG NUMBER,  
WIRE RANGE,  
# ALTY.
  6. AUTHORIZED SOURCE : INT'L HYDRAULICS.

**INTERNATIONAL HYDRAULICS**  
INCORPORATED

WFM

**2S500**

ENGR. BY GDMK	DATE 11/18/88	DRAWING NO. 14221	REV. A
CHK. BY N-18	SCALE		