


4444

PART NO

UL RECOGNIZED

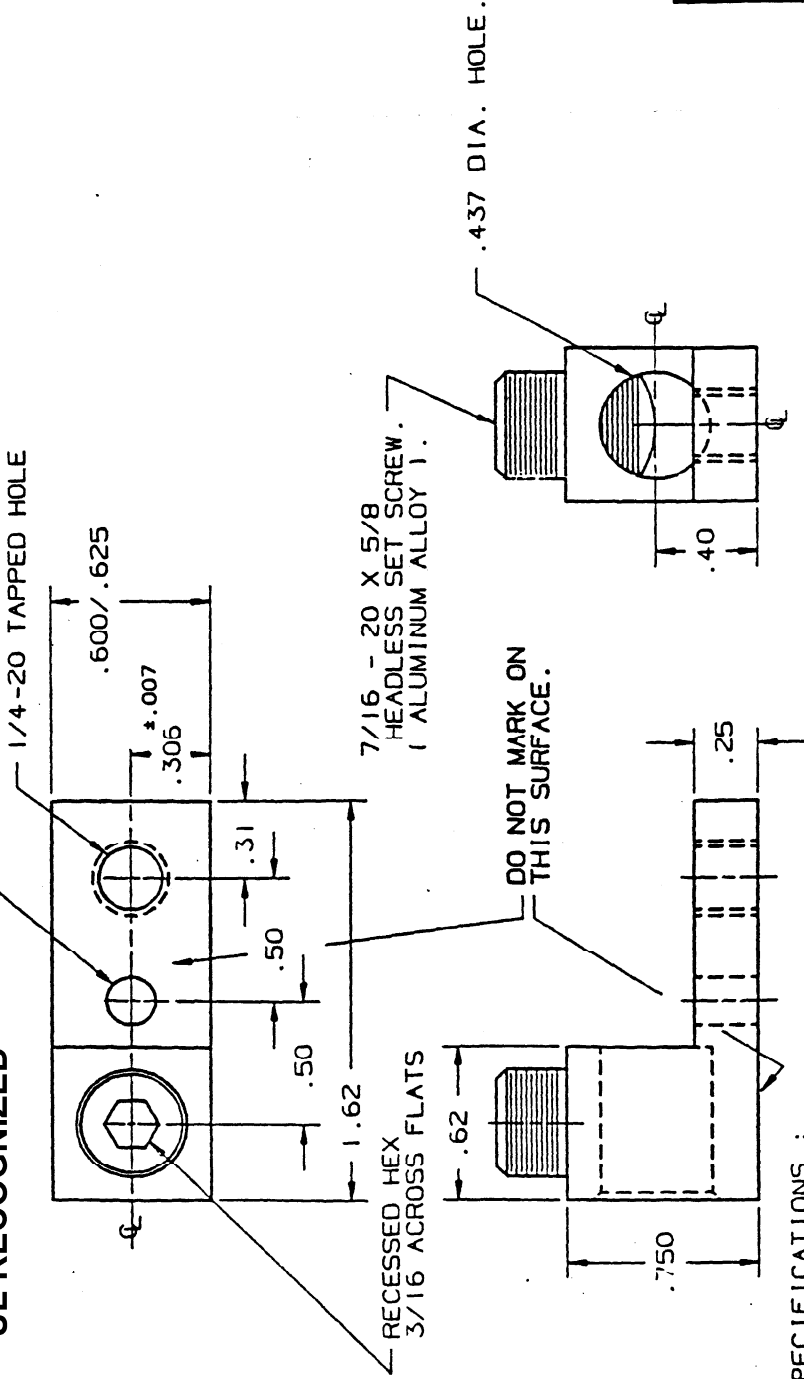

SPECIFICATIONS :

1. WIRE RANGE : 2/0-14CU , 2/0-8AL 12/0-12AL IS ALSO ACCEPTABLE .1
2. CONNECTOR TO BE UL LISTED OR RECOGNIZED AND CSA CERTIFIED FOR TERMINATING COPPER AND ALUMINUM CONDUCTORS.
3. WIRE CLAMPING SCREW : ALUMINUM ALLOY, 7/16-20X5/8 RECESSED HEX DRIVE, 3/16 ACROSS FLATS, DOME SHAPED BOTTOM.
4. TIGHTENING TORQUE : WITH WIRE INSTALLED, CONNECTOR MUST WITHSTAND 135IN/LBS. OF TIGHTENING TORQUE WITHOUT DAMAGE TO THE CONNECTOR OR PRESSURE SCREW.
5. MARKING SHALL INCLUDE : 5.1 MANUFACTURER'S NAME OR SYMBOL.
5.2 MANUFACTURER'S PART NO.
5.3 WIRE RANGE.
5.4 AL9CU.

TITLE		CONNECTOR	
DESIGNED BY	DATE	REV	SCALE
APPROVED BY	5-25-88	2	1
DRAWN BY	PART NO	4444	

E129884