

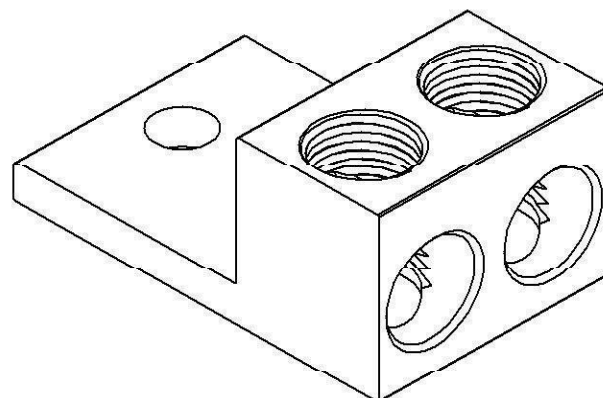
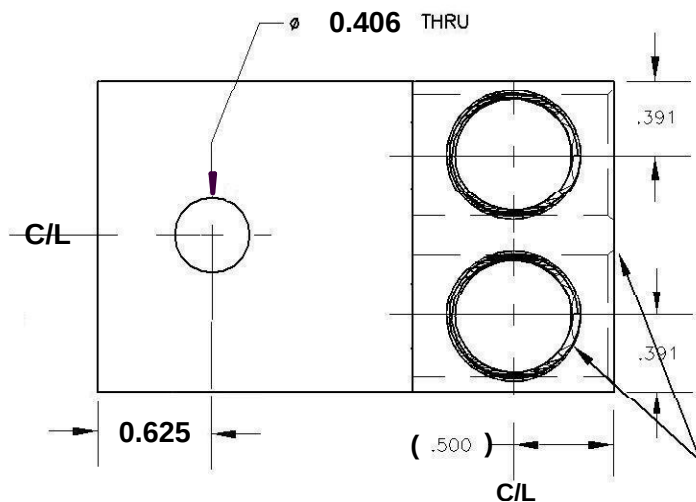


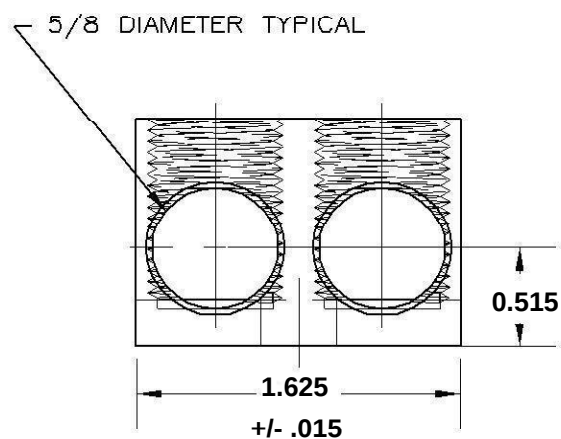

CHAMFER .031 X 45° REF ONLY

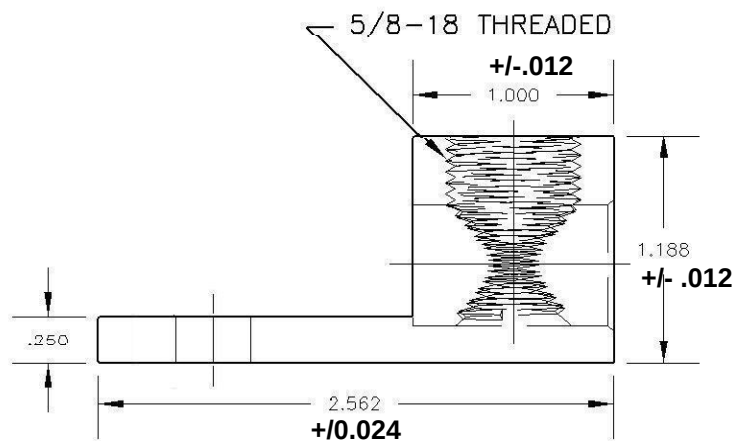

MARKING: " IHI 2S250 250kcmil-6 UL CU9AL CSA"

MACHINING AND GENERAL TOLERANCES +/- .010

COMMERCIAL STANDARDS ON BARREL PLATING AND BURRS

ASSEMBLED WITH (2) IHI 14237 ALUMINUM 5/8-18 HEX SCREW, 3/8 HEX SOCKET DRIVE, 13/16 LONG

IHI CATALOG
"2S250"

THIS DRAWING AND DESIGN ARE THE PROPERTY OF INTERNATIONAL HYDRAULICS INC., CLEVELAND, OHIO, AND MAY NOT BE DUPLICATED, USED FOR BASIS OF DESIGN OR MANUFACTURE WITHOUT THE WRITTEN PERMISSION OF INTERNATIONAL HYDRAULICS INC., CLEVELAND, OHIO.	
1. DIMS ARE IN INCHES 2. TOLERANCE ON DIM'S 2 PLACE (.00) ± .010 3 PLACE (.000) ± .005 FRACTION ± 1/32 ANGLES ± 1/2°	3. REMOVE ALL BURRS AND SHARP EDGES.
MATERIAL ALUMINUM 6061-T6	
FINISH TIN PLATE	

INTERNATIONAL HYDRAULICS, INC.				
TITLE DOUBLE LUG - ALUMINUM WIRE RANGE: 250MCM - 6				
SIZE A	DRAWN BY JDB	CHECK	DWG NO 2S250	REV 0
DATE 01.10.2000			THIS IS A CAD DRAWING, DO NOT MANUALLY REVISE	